

# FLUCON

## Resistivity meter

### CR-200A




Measuring range : 0~18.25 MΩ.cm

#### ► SPECIFICATION

##### 1. Monitor

- Channel : 1 channel
- Accuracy : 2.0%(FS)
- Output : 4~20mA(option)
- Resistivity  
Range : 0~18.25 MΩ.cm

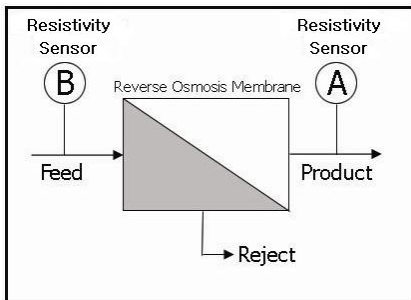

##### 2. Cell

- Connector : 1/2"PT(M)
- Max. Pressure : 0.5 MPa
- Max. Temp. : 50℃
- Material : Electrode : 316SS  
Fitting : Polypropylene
- Temp. Compensation  
: Pt1000 @25℃

#### ► APPLICATIONS (적용분야)

- Pure water system
- Pharmaceuticals
- Laboratories
- Food processing
- Electronics

#### ► ORDERING INFORMATION (주문방법)

##### 1. Monitor

CR 200A     -  -   
                   ①            ②            ③

① Channel	② Power(AC only)	③ Output
1 : 1CH	A : 110V~220V AC (Selectable) D : 24V DC (Option)	1 : 4~20mA

##### 2. Cell


CE 20 -

Cable
L3 : Cable 3m
L* : Request Length


### ▶ DIMENSION

설계치수는 영업부에 문의 또는 승인도를 요청바랍니다. 상기 치수는 변경될 수 있습니다.


For exact size of each item, Please contact Sales Dept. Above-mentioned dimensions are changeable.

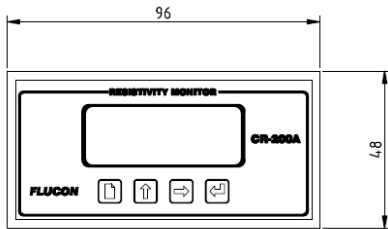

(FRONT VIEW)

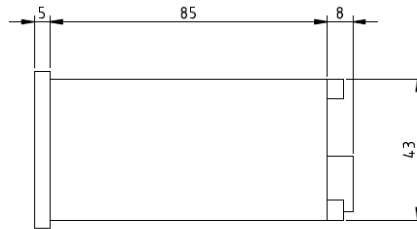

(SIDE VIEW)

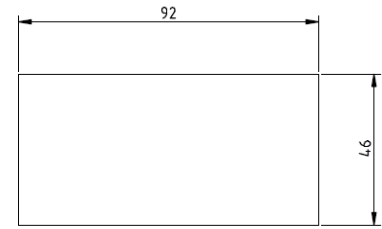

(PANEL CUTTING DIMENSION)