



수질 전도계

Conductivity meter


Measuring range : 0~200 μ S/cm**CR 100A**

Specifications 사양

Monitor		Cell	
Channel	1 channel	Connector	1/2"NPT(M)
Accuracy	±2% full scale	Max. Pressure	0.5 MPa
Output	1CH 4~20mA(option) RS 232(option)	Max. Temp.	50°C
Relay	SPDT(Hi, Lo)	Material	Electrode : 316SS
Power	AC only(110V or 220V)		Fitting : Polypropylene
Conductivity Range	0~200 μ S/cm 0~20 μ S/cm (Option) 0~2000 μ S/cm (Option)	Temp.Compensation	Pt1000 @25°C

Applications 사용 분야

- Pure water system
- Pharmaceuticals
- Laboratories
- Food processing
- Electronics

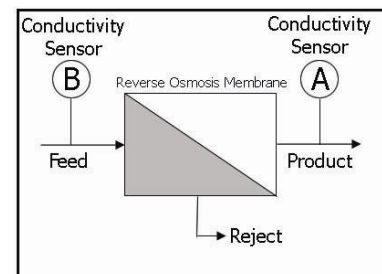

Ordering Information 주문 방법

1. Monitor

CR 100A - □ - □ - □ - □
① ② ③ ④

① Channel	② Power	③ Output	④ Range
1 : 1CH	A : 220V AC	1 : SPDT relay 2 : 4~20mA 3 : RS 232	1 : 0~200 μ S/cm 2 : 0~20 μ S/cm 3 : 0~2,000 μ S/cm

2. Cell

CE 20 - □

Cable
L3 : Cable 5m L* : Request Length

Dimension 크기

설계치수는 영업부에 문의 또는 승인도를 요청 바랍니다. 상기 치수는 변경될 수 있습니다.

For exact size of each item, Please contact Sales Dept. Above-mentioned dimensions are changeable.

