




수질 저항계 Resistivity & Conductivity

CR 200

Specifications 사양

Monitor		Cell	
Channel	1 channel	Connector	3/4"NPT(M)
Accuracy	±2% full scale	Max. Pressure	0.5 MPa
Output	4 ~ 20mA and Relay	Max. Temp.	50°C
Range	(1) 0.5 ~ 19.99MΩ·cm	Material	Electrode : 316SS
	(2) 50 ~ 1,999.9 K Ω·cm		Fitting : Polypropylene
		Temp. Compensation	Pt1000 @25°C

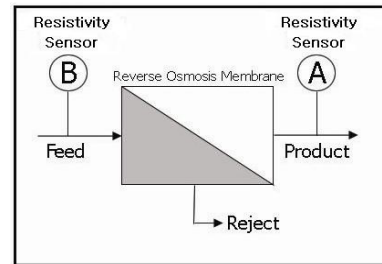

Applications 사용 분야

- Pure water system
- Pharmaceuticals
- Laboratories
- Food processing
- Electronics

Panel Description 패널 사양



Hi	상한 알람 표시 램프	M	MΩ.cm 상태표시 램프
Lo	하한 알람 표시 램프	K	KΩ.cm 상태표시 램프
	메뉴키		설정치 변경키
	엔터키		설정치 변경키

Ordering Information 주문 방법

1. Monitor

CR 200 - - - - S25 -

① ② ③ ④

2. Cell

① Channel	② Power	③ Output	④ Range
1 : 1CH	B : 220V AC	1 : 4~20mA And Relay	K : 50 ~ 1,999.9KΩ·cm M : 0.5 ~ 19.99KΩ·cm

Cable
L3 : Cable 5m S2x : Request Length

Dimension 크기

설계치수는 영업부에 문의 또는 승인도를 요청 바랍니다. 상기 치수는 변경될 수 있습니다.
For exact size of each item, Please contact Sales Dept. Above-mentioned dimensions are changeable.

