



수질 저항계 Resistivity meter

Measuring range : 0~18.25 MΩ.cm


CR 200A

Specifications 사양

Monitor		Cell	
Channel	1 channel	Connector	1/2"NPT(M)
Accuracy	2.0%(FS)	Max. Pressure	0.5 MPa
Output	4~20mA(option)	Max. Temp.	50°C
Resistivity Range	0~18.25 MΩ.cm	Material	Electrode : 316SS Fitting : Polypropylene
		Temp.Compensation	Pt1000 @25°C

Applications 사용 분야

- Pure water system
- Pharmaceuticals
- Laboratories
- Food processing
- Electronics

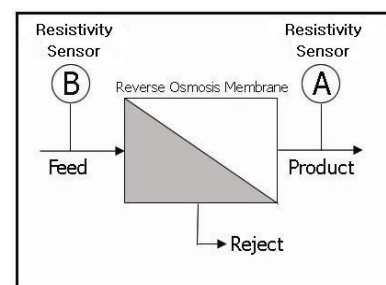

Ordering Information 주문 방법

1. Monitor

CR 200A - □ - □ - □
① ② ③

① Channel	② Power	③ Output
1 : 1CH	A : 220V AC (Selectable) D : 24V DC (Option)	1 : 4~20mA


2. Cell

CE 20 - □


Cable
L3 : Cable 3m L* : Request Length

Dimension 크기


설계치수는 영업부에 문의 또는 승인도를 요청 바랍니다. 상기 치수는 변경될 수 있습니다.
For exact size of each item, Please contact Sales Dept. Above-mentioned dimensions are changeable.

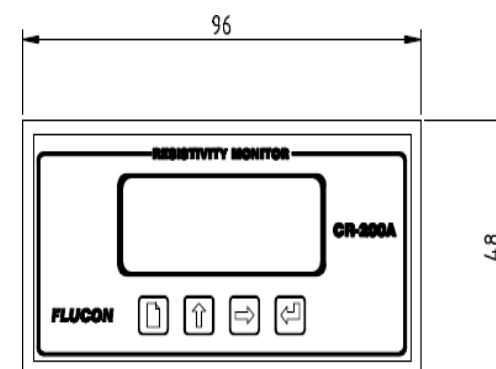

(FRONT VIEW)

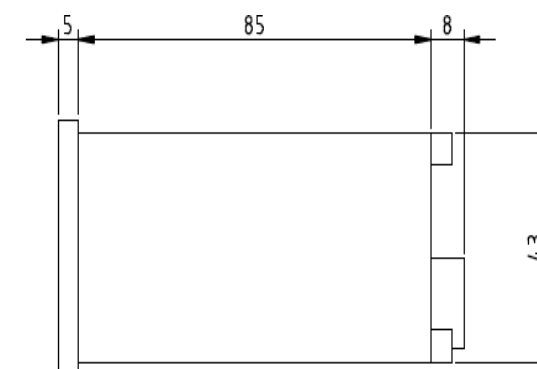

(SIDE VIEW)

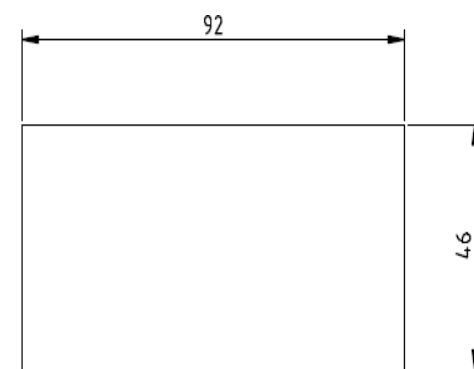

(PANEL CUTTING DIMENSION)